

Apogee Air & Land Series

ULTIMATE ACCURACY MEMS Inertial Navigation System



ITAR
Free

0.005°
RMS

INS
MRU
AHRS



Motion Sensing
& Georeferencing



APOGEE SERIES makes high accuracy affordable for all surveying companies. On the fields of hydrography, mobile mapping, or remote sensing, the Apogee joins robustness, simplicity to high performance.



HIGH QUALITY HIGH ACCURACY

SBG SYSTEMS manufactures high quality, high accuracy inertial navigation systems from the design to the production. The Apogee benefits from our high level of expertise in integrated design, IMU calibration, testing, and filtering.



Highly Accurate



ATTITUDE AND POSITION - AEROSPACE APPLICATIONS

	GNSS L1/L2/L5	RTK*	PPK**
Roll/Pitch	0.01°	0.008°	0.005°
Heading - Dual antenna (2m baseline)	0.04°	0.04°	0.02°
Heading - Dual antenna (4m baseline)	0.025°	0.025°	0.02°
Position (X/Y)	1.0 m	0.01 m	< 0.01 m
Altitude (Z)	1.0 m	0.03 m	< 0.02 m

ATTITUDE AND POSITION - LAND APPLICATIONS***

	GNSS L1/L2/L5	RTK*	PPK**	RTK 60 sec outage	PPK 60 sec outage
Roll/Pitch	0.01°	0.008°	0.005°	0.012°	0.008°
Heading - Single antenna	0.04°	0.04°	0.02°	0.06°	0.025°
Position (X/Y)	1.0 m	0.01 m	< 0.01 m	0.5 m	0.3 m
Altitude (Z)	1.0 m	0.03 m	< 0.02 m	0.1 m	0.05 m

*Real Time Kinematic

** Post-processing Kinematic


***With odometer aiding

RMS values for typical survey trajectories

Performance may be affected by atmospheric conditions, signal multipath, and satellite geometry.

All specifications subject to change without notice.



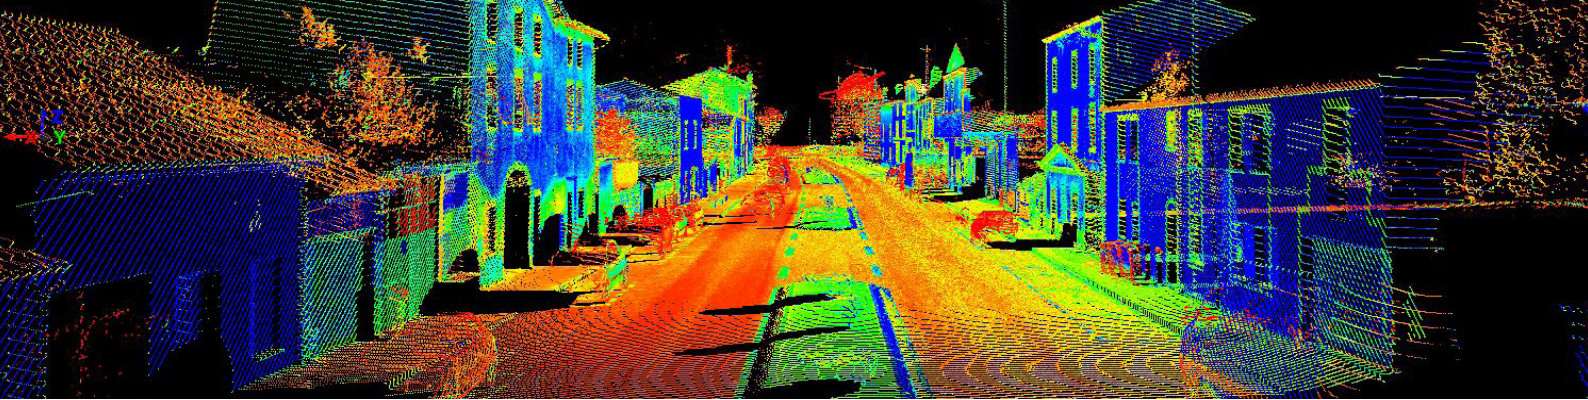

Precise Trajectory & Direct Georeferencing

ACCURATE TRAJECTORY
DURING GNSS OUTAGES

VERY LOW NOISE GYROSCOPES

LATEST GENERATION OF
TRI-FREQUENCY GNSS RECEIVER

INTERNAL 8 GB DATA RECORDER

LAND MOBILE MAPPING

Robust position in urban canyons, forest, tunnels thanks to:

- » Continuous fusion with Inertial and odometer data
- » Real time and off-line RTK corrections
- » Post-processing software
- » Tight GNSS integration for optimal position in multipath environments

AERIAL SURVEY



High accuracy real-time external orientation and direct georeferencing thanks to:

- » RTK, TerraStar, or OmniSTAR corrections
- » Low latency (3 ms)
- » High resistance to vibrations (can be used on helicopter)
- » Post-processing software

Modern and Easy-to-use Inertial Sensors

WEB INTERFACE

Connect your sensor and configure it throughout the intuitive web interface.

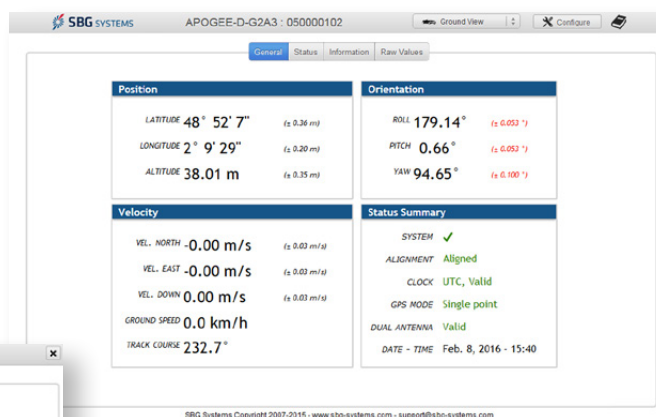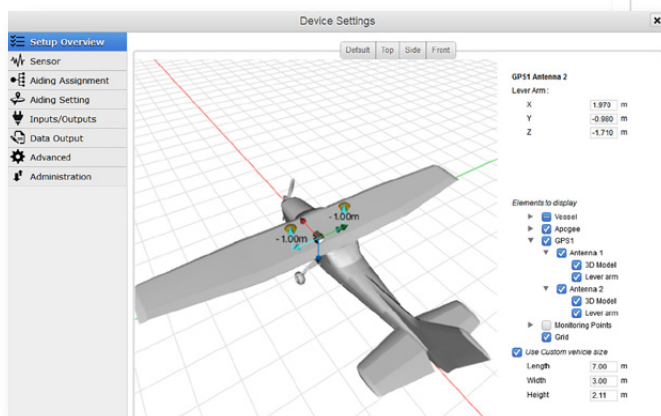


3D VIEW


The new 3D View helps you to check your mechanical installation, especially your sensor position, your alignments, and lever arms.



Easy Integration, Precise Synchronization




COMPACT,
LIGHTWEIGHT &
LOW POWER



ETHERNET,
RS-232, RS-422, CAN
PROTOCOLS



ACCURATE UTC TIME
STAMPING (1 μ s)



UP TO 5 EVENT
INPUT MARKERS

WHY MEMS TECHNOLOGY?

- » Low-power consumption
- » Cost-effective

- » Highly Robust
- » Compact and Light-weight

Versatile Product Line



Apogee-A
Motion Sensor



Apogee-E
INS & SplitBox GNSS



Apogee-N
INS/GNSS



Apogee-D
INS/Dual GNSS

Model	Apogee-A Motion Sensor	Apogee-E INS & SplitBox GNSS	Apogee-N INS/GNSS	Apogee-D INS/Dual GNSS
Roll, Pitch, Heading	●	●	●	●
Navigation		●	●	●
GNSS receiver		SplitBox GNSS with Dual antenna L1/L2/L5 GPS + GLONASS Option: GALILEO, BEIDOU	Single-antenna L1/L2/L5 GPS + GLONASS Option: GALILEO, BEIDOU	Dual-antenna L1/L2/L5 GPS + GLONASS Option: GALILEO, BEIDOU
DGPS		●	●	●
Omnistar / Marinestar*		●		
Terrastar / Veripos		○	○	○
RTK 30/30		●		
RTK 10/10		○		
RTK		○	○	○
Post-processing (raw data)**		○	○	○
External Aiding	GNSS for optimal orientation, and navigation perf.		Up to two external GNSS receivers, Odometer (DMI)	

*Subscription available from third party PPP service provider

**Raw data are compatible with Novatel Inertial Explorer® software Inertial Explorer® is a registered trademark of NovAtel Inc.

All trademarks are property of their respective owners.
All specifications subject to change without notice.

● Standard ○ Option



CONTINUOUS POSITION

Continuous fusion of inertial data with GNSS information stabilizes the position output, effectively eliminating the impact of multipath and signal outages, when the vehicle is passing in dense urban areas for example.

Specifications

All parameters apply to -20 to 60°C temperature range, unless otherwise stated. Full specifications can be found in the Apogee Hardware Manual available upon request.

PHYSICAL CHARACTERISTICS

Model	Apogee-A/E	Apogee-N/D
Weight	< 690 grams 1.52 pounds	< 900 grams 1.98 pounds
Dimensions (L x W x H)	130 x 100 x 58 mm 5.12 x 3.94 x 2.28 "	130 x 100 x 75 mm 5.12 x 3.94 x 2.95 "
Consumption	< 3 W	< 5 W / < 7 W
Supply	9 to 36 VDC	9 to 36 VDC

ENVIRONMENTAL

IP rating Apogee- A/D/E/N	IP68 (Aluminium)
Specified temperature	-20 to 60 °C / -4 to 140 °F
Operating temperature	-40 to 71 °C / -40 to 160 °F
MTBF (computed)	50,000 hours
Operating vibrations	20 Hz to 2 kHz as per MIL-STD-810G Accelerometer 10 g: 8 g RMS

INTERFACE

Aiding (input)	2x GNSS, RTCM, Odometer
Protocols	Output: NMEA, ASCII, Binary, TSS, Simrad Input: NMEA, Trimble, Novatel, Septentrio, Hemisphere, Veripos, Fugro, PDO, PD6
Output rate	0.1 to 200 Hz
Logging Capacity	8 GB or 48 h @ 200 Hz
Serial RS-232/422	Model N/D - 2 outputs / 4 inputs Model A/E - 3 outputs / 5 inputs
Ethernet	Full Duplex (10/100 base-T)
CAN	1 CAN 2.0 A/B bus up to 1 Mbit/s
Pulses	Inputs: PPS, Event marker up to 1 kHz Outputs: SyncOut, Trigger, PPS 5 inputs / 2 outputs

SENSOR PERFORMANCE

	Accelerometers	Cyrosopes
Measurement range	10 g	200 °/s
Bias in-run instability	< 15 µg	< 0.08 °/hr
Random walk	< 75 µg	< 0.012 °/√hr

All specifications subject to change without notice.



SBG Systems is a leading supplier of MEMS-based inertial motion sensing solutions. The company provides a wide range of inertial solutions from miniature to high accuracy. Combined with cutting-edge calibration techniques and advanced embedded algorithms, SBG Systems products are ideal solutions for industrial & research projects such as unmanned vehicle control, surveying applications, antenna tracking, and camera stabilization.

PRODUCTS



Apogee Marine




Ekinox Series



SplitBox Series

VIDEO



Apogee Series

SBG Systems EMEA (Headquarters)

Phone: +33 1 80 88 45 00

E-mail: sales@sbg-systems.com

SBG Systems North America

Phone: +1 (657) 845 1771

E-mail: sales.usa@sbg-systems.com

www.sbg-systems.com